



**Reliable  
Refrigeration  
Solutions**




**Maruzen**

# Automated Noodle Boiler

<Electric Model>



**MREY-L06**

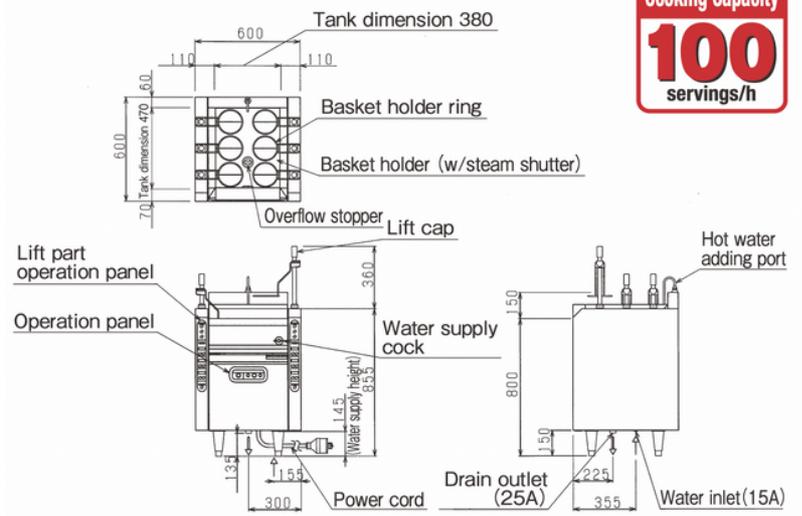

**Cooking Capacity**  
**100**  
servings/h

## PRODUCT SPECIFICATIONS

Model	Dimensions (mm)	Tank Water Amount (L)	Baskets	Capacity (Per Hour)	Power
MREY-L06	W600 x D600 x H800(+150)	40L	6	100 Meals	3 Phase / 415V / 50/60Hz / 9.1kW / 14.8A / 20A Isolator





# Suzuchu Automatic noodle boiler/Suzuchu Square-tank noodle boiler

## Popular Ramen can be easily-and-deliciously cooked by latest noodle boiler which is praised even in the specialized shop.

### 4 and 6 hand basket type model is Suzuchu specification.

- A double heat insulating structure can be achieved by covering the inside of main body with a heat insulator and further by providing a heat insulating layer in the surrounding area. The double heat insulating structure let the optimized air flow inside the equipment to take heat from the main body which suppresses the radiation heat from the equipment and decrease the surface temperature.
- The front surface of main body is provided with an intake port and exhaust port for making air flow which can suppress the temperature rise of the front surface and enhance the safety.
- An exhaust stack is a chimney structure which prevents exhaust gas from spreading. The exhaust gas can quickly be led to a hood while improving environment in the kitchen.



Air flows in the direction of arrow for taking heat out from main body.



Airflow on the heat insulating layer of a back guard takes heat from the back surface of main body. Exhaust gas can be prevented from spreading.



涼 (Suzuchu)

"Suzuchu equipment"

is the certified gas appliances that are designed to resist heating up room temperature by exhausting intensively and insulating hot part to lower the radiant heat on the surface of equipment. Therefore, the temperature is kept low so you can touch and convert the work place much more comfortable and safer. ("Suzuchu" is a trademark and 「涼」 is the registered trademark of Osaka Gas.)

### Large-sized boiling tank for making noodle delicious with chewy texture.

Comfortably and strong chewy texture of noodle can be performed by boiling noodle with rich hot water at the high speed. Maruzen automatic noodle boiler adopts a large boiling tank. Whenever and everyone can boil delicious noodles which professionals praise.



● Chewy and delicious noodle can be cooked because boiling water is spouted in the boiling basket intensively. (Picture is MRY-CL06)

### Maruzen original hole heat pipe.

Maruzen special circulation heating method is adopted, realizing the heat efficiency of 60% and it is economical with no waste of energy while performing the excellent boiling ability.

### Hot water supply device has energy-saving design by utilizing exhaust heat.

Scum and slime can be removed by overflow without lowering the temperature inside the boiling tank, so continuous cooking can be performed.



● Steam shutters for enhancing heat efficiency through which boiling basket can be pushed.

### Steam shutters to enhance heat efficiency and safety.

Automatically closed when the boiling basket is not in use to prevent boiling water from splashing. Since heat is not given out, heat efficiency is enhanced and boiling time becomes shorter with energy-saving.

### Maruzen Original Hole Heat Pipe!

Energy is absorbed efficiently without waste by special circulation heating method.



Products with this mark, has passed the type inspection of the Japan Gas Appliances Inspection Association. (LP gas, 13A)



### Suzuchu Automatic noodle boiler

Lift-down automatically when you push the Lift Cap. Buzzer & Lift-up automatically when the set time comes. You do not need to check the status of boiled noodle. Everybody can boil delicious noodles. It is useful at peak times as well as laborsaving. Timer is touch-panel method which is easy to be used. The time can be set in 1 second increments. When you push the Lift Cap during cooking, the boiling stops and lift goes up automatically. Baskets can be lifted up and down by Touch-panel too.

### Lift-down automatically when you push the Lift Cap of basket! "Suzuchu Automatic noodle boiler" which lifts up after boiled.



Lift down when you push the Lift Cap.


Touch-Panel



# Noodle Boiler (Electric Type)


## AUTOMATIC

### MREY-L03L

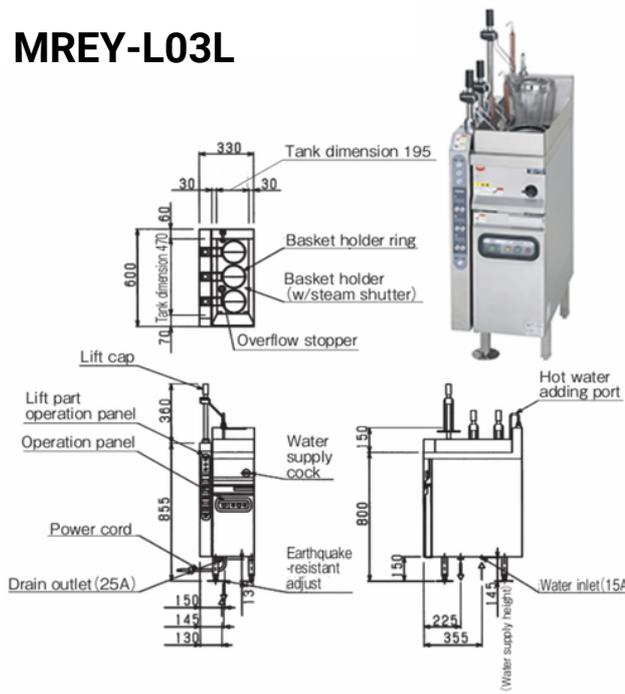

## MANUAL

### MREY-03-TY

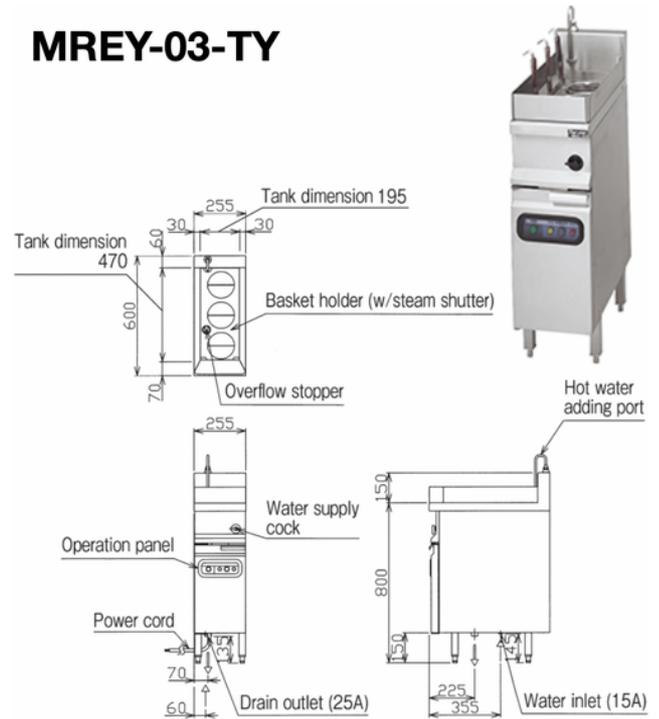

## PRODUCT SPECIFICATIONS

Model	Dimension	Amount of water in tank	Baskets	Capacity (Per Hour)	Power
MREY-L03R	W330 x D600 x H800(+150)	20L	3	50 Meals	415V / 4.6kW (50/60Hz)
MREY-03-TY	W255 x D600 x H800(+150)	20L	3	50 Meals	415V / 4.5kW (50/60Hz)





**Reliable  
Refrigeration  
Solutions**




**Noodle Boiler  
(Electric Type)**


**Auto Noodle Boiler**

**Baskets lifted up at an accurate boiling time.  
Not troublesome even in a peak time.**

**MREY-L04**

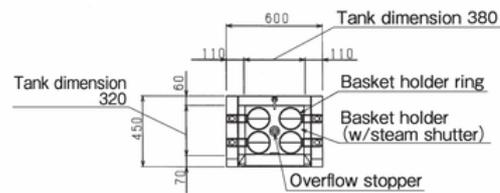

**Cooking Capacity**  
**70**  
servings/h

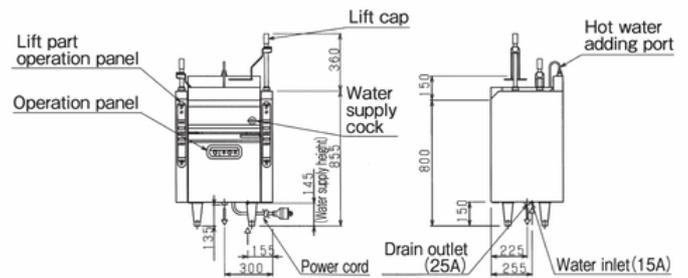

**PRODUCT SPECIFICATIONS**

Model	Baskets	Dimension	Tank	Weight	Capacity	Power
MREY-L04	4	W600 x D450 x H800(+150)	28(L)	73KG	70 Meals / HR	200V / 6.5kW (50/60Hz)

\*We reserve the right to make changes in specifications and design without prior notice.

**Find out more:**  
+65 8829 3509  
enquiry@tyinnovations.com

